



DROMEAS

ALMA S

Surface

Three-layer chipboard with 25 mm thick side-by-side melamine coating and ABS 2mm thickness edge banding perimeter

Frame

Fixed height 730mm.
Metallic two-legged symmetrical double "T", painted with electrostatic paint

Restorers

For smoothing floors 0-20mm

Traverse

One with the feet, 90x50x2mm rectangular steel rectangle for maximum durability


Feet

Horizontally made of cast-pressed aluminum, painted or polished




<https://www.dromeas.gr/>

Dimensions

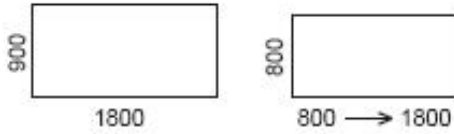

COLOR CHART

Melamine surface

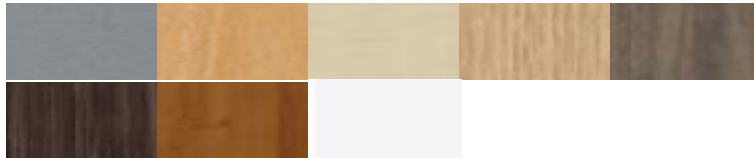

Metallic frame colors



CERTIFICATES

BS 6396:2008
 EN527-1:2011
 EN527-2:2002
 EN527-3:2003
 BS EN ISO 15372 : 2008
 IEC 60364-7-713:1996
 BS EN ISO 9241-5:1999
 DIN - Fachbericht
 147:2006
 RAL-UZ 38

