



DROMEAS

ALMA HT (650-1290mm)

Electrically adjustable legs

Adjustable height 650-1290mm. Telescopic legs, powder coated

Surface

25mm 3-layer chipboard with double-sided melamine coating and 2mm ABS edge-banding

Regulator


For leveling, with an adjustment range of 0-20mm

Controller

Choice between simple or memory controller
(The Bluetooth Controller features: Display, Bluetooth, Reminder, Memory).

Feet

Horizontal soles consisting of molded and welded steel sheets.

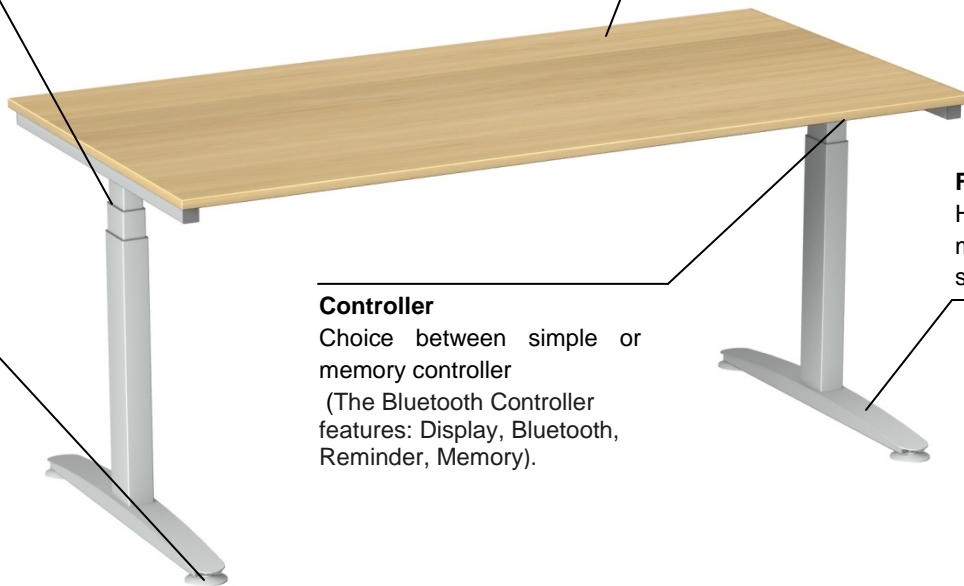

<https://www.dromeas.gr/>



DROMEAS

ALMA HC (650-1290mm)

Electrically adjustable legs

Adjustable height 690-1300mm. Telescopic legs, powder coated

Surface

25mm 3-layer chipboard with double-sided melamine coating and 2mm ABS edge-banding

Feet


Horizontal soles consisting of molded and welded steel sheets.

Controller

Choice between simple or memory controller
(The Bluetooth Controller features: Display, Bluetooth, Reminder, Memory).


Regulator

For leveling, with an adjustment range of 0-20mm

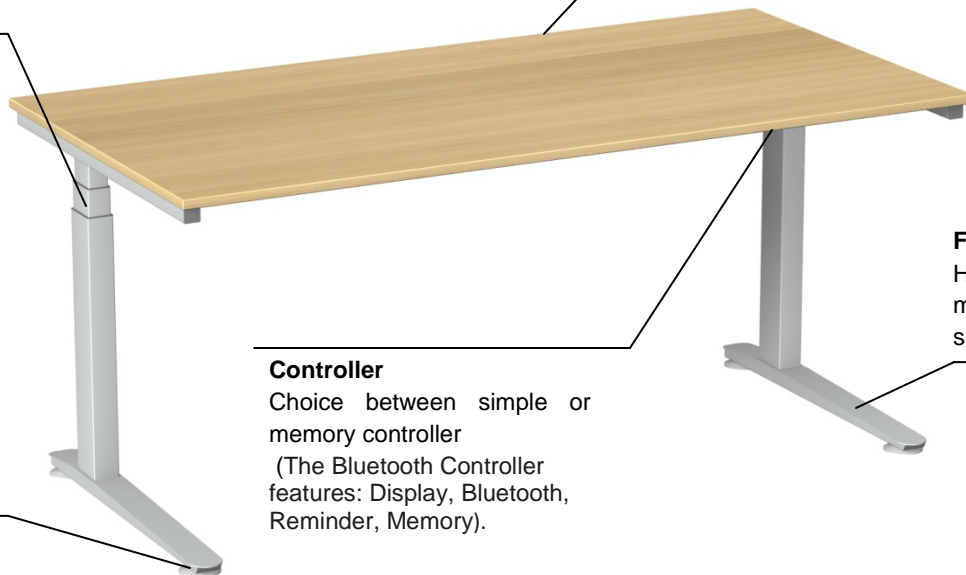

<https://www.dromeas.gr/>

DIMENSIONS

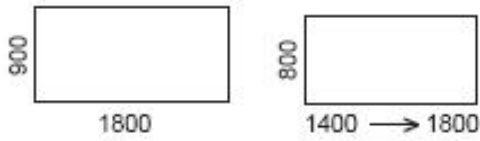

COLOR CHART

Melamine Surface



Metallic frame colors



Certificates

BS 6396:2008
EN527-1:2011
EN527-2:2002
EN527-3:2003
BS EN ISO 15372 : 2008
IEC 60364-7-713:1996
BS EN ISO 9241-5:1999
DIN - Fachbericht
147:2006
RAL-UZ 38

